


Product end of life instruction.

This Lighting product is in the scope of EU 2019/2020 directive on Waste Electrical and Electronic Equipment (WEEE). This product must be disposed according to the legislation. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. Please follow pictured diagram on the back of this manual showing how to dismantle the product into different components which should be disposed correctly. These components would consist of plastic, metal and electronic materials. It is the responsibility of the end user to dispose of this product correctly. Contact your local council for further information.

Disassembly Diagram

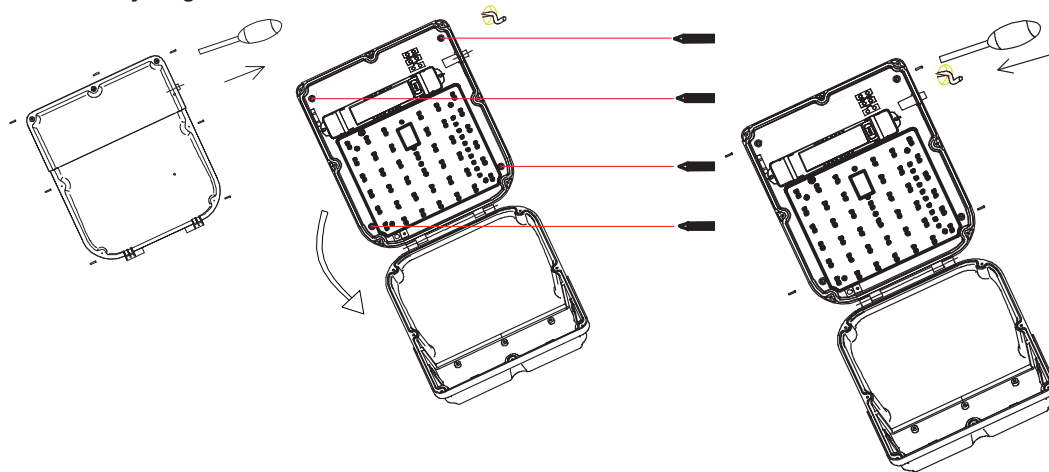

Installation Guide



Warning

- Please read these instructions carefully before commencing any work. This unit must be fitted by a Qualified Electrician.
- This is a Class 1 product and must be earthed.
- Install in accordance with IEE Wiring regulations and current building regulations.
- To prevent electrocution, switch off at mains supply before installing or maintaining this fitting. This light fitting should be connected to a circuit with a 30mA RCD fitted.
- If replacing an existing fitting, make a careful note of the connections.
- This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.
- Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.
- This product is rated at IP65.
- This product is not suitable for dimming.

| Product Code: | Voltage: | Lamp: | IP Rating: | Colour Rendering Index | CCT Choice: |
|---------------|--------------------|---------------|------------|------------------------|---------------------|
| WP30-CT | 200-240V ~ 50/60Hz | 30W 48PCs SMD | IP65 | CRI>80 | 3000k, 4000k, 6000k |
| WP30-CT-PH | 200-240V ~ 50/60Hz | 30W 48PCs SMD | IP65 | CRI>80 | 3000k, 4000k, 6000k |

Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- The mains supply cable must have a minimum cross sectional area of 1.0mm².
- Cables must be protected using suitable conduit or plastic trunking.
- The product can be wall or ceiling mounted.
- The correct fixings should be used for brick, cavity or plasterboard.

Commissioning


- Ensure that the screws and cable entry points are sealed to maintain the IP rating of the product.
- Refit the shade and outer bezel and secure with the screws. Ensure the seals are correctly located.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.
- Fitting/Replacing Bulbs
- This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.
- We recommend cleaning with a soft dry cloth.
- Do not use solvents or abrasive cleaners as these could damage the finish.

Recycling Advice

- Waste electrical products should not be disposed of with household waste.
- Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety Information

- For your safety, always switch off the supply before cleaning.

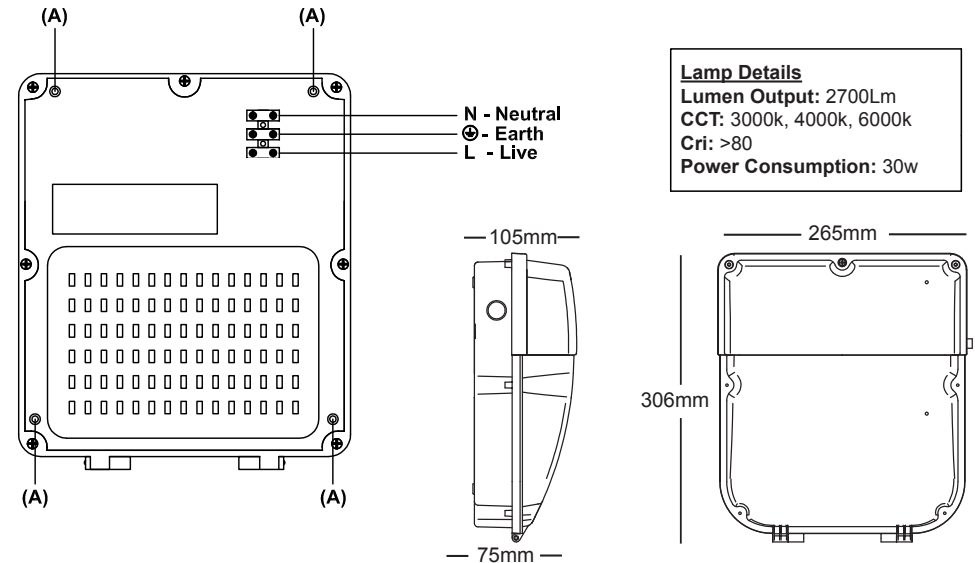

Fitting/Replacing Bulbs

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

We recommend cleaning with a soft dry cloth.

Do not use solvents or abrasive cleaners as these could damage the finish.

Recycling advice

Waste electrical products should not be disposed of with household waste. See back page for details

Safety Information

For your safety, always switch off the supply before cleaning.